

Powerspread

Features

- Low horsepower requirement
- Even and accurate spread pattern with spread width of up to 18 metres
- Will spread both slurry and farmyard manure
- Fast and efficient work rates achieved by patented centrally opening door and overshot impeller
- Vertically opening sealed door allows the full width of the impeller to be used even when applying a fine covering of manure

- Strong and reliable - 8mm thick floor
- Even weight distribution and good stability provided by tapered body design and low central auger
- Low level model for use with slurry ramps and restricted height areas
- Easy to maintain heavy duty chain and sprocket drive
- Separate shear bolt protection for main auger and impeller
- Road legal lighting kit & hydraulic brakes fitted as standard



Dairy

The Dairy range is designed as a basic machine for a wide range of solid and liquid farmyard manure spreading operations.



Contractor

The Contractor range is designed for a wide range of farm contractor or commercial waste disposal applications. The 3 auger speeds allow liquid, solid farm and human waste, as well as poultry manure and green waste to be both chopped and spread consistently. The drop down discharge rotor, sprung loaded discharge panels and reverse auger drive allow foreign objects to be removed more easily.




Standard Equipment


- Sizes available from 6,350l (1400 gallons) - 9,000l (2000 gallons) (Capacity stated is when level full)
- Main auger has fixed paddles
- Single auger drive speed of 13 rpm
- 21.3 - 24 x 12 ply tyres
- Fixed position discharge rotor

- Sizes available from 7,250l (1600 gallons) - 12,750l (2800 gallons) (Capacity stated is when level full)
- Heavy duty 3 speed drive giving auger speeds of 3, 9 & 13 rpm
- Automatic chain lubrication system
- Single point bearing greasing system
- Auger reverse drive system
- Shear bolt protected, sprung loaded paddles fitted on auger
- Drop-down discharge rotor
- Quick release drop-down drip tray
- Heavy-duty high speed road axle
- 23.1 R26 14ply (1600 - 2000), 650/55 - 30.5 (2200 - 2800)
- Wide angle p.t.o.

Optional Equipment

- 23.1 R26 14ply wheels and tyres
- Wide angle PTO
- Hydraulic anti bridging device

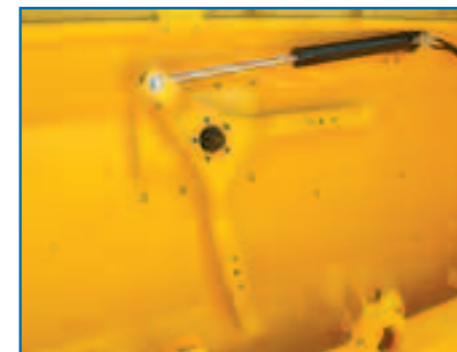

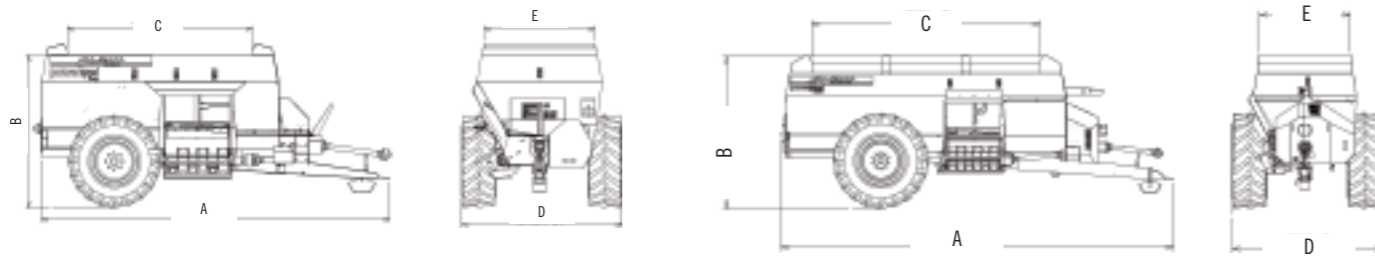

	1400	1600	1800	2000
Capacity in Gallons	6350 litres 1400 gallons	7250 litres 1600 gallons	8000 litres 1800 gallons	9000 litres 2000 gallons
Volume	6.35m ³	7.25m ³	8.00m ³	9.00m ³
Length (A)	5.41m (17'9")	5.41m (17'9")	5.41m (17'9")	5.41m (17'9")
Width (D)	2.52m (8'3")	2.52m (8'3")	2.52m (8'3")	2.52m (8'3")
Loading height (B)	2.06m (6'9")	2.27m (7'5")	2.42m (7'11")	2.57m (8'5")
Opening length (C)	2.84m (9'4")	2.9m (9'6")	2.69m (8'10")	2.69m (8'10")
Opening width (E)	1.55m (5'0")	1.55m (5'0")	1.55m (5'0")	1.55m (5'0")
Unladen Weight	2841kg 6264lbs	2900kg 6395lbs	2945kg 6494lbs	3000kg 6615lbs
Gross Weight	8241kg 18171lbs	8300kg 18302lbs	8345kg 18400lbs	8400kg 18522lbs

	1600	1800	2000	2200	2500	2800	2800 tandem axle
Capacity in Gallons	7250 litres 1600 gallons	8140 litres 1800 gallons	9000 litres 2000 gallons	10250 litres 2200 gallons	11250 litres 2500 gallons	12750 litres 2800 gallons	12750 litres 2800 gallons
Volume	7.25m ³	8.14m ³	9.0m ³	10.25m ³	11.25m ³	12.75m ³	12.75m ³
Length (A)	5.77m (18'11")	5.77m (18'11")	5.77m (18'11")	7.37m (24'2")	7.37m (24'2")	7.37m (24'2")	7.37m (24'2")
Width (D)	2.75m (9'0")	2.75m (9'0")	2.75m (9'0")	2.75m (9'0")	2.75m (9'0")	2.75m (9'0")	2.75m (9'0")
Loading height (B)	2.43m (8'0")	2.58m (8'6")	2.73m (9'0")	2.38m (7'10")	2.53m (8'4")	2.68m (8'10")	2.68m (8'10")
Opening length (C)	2.68m (8'10")	2.68m (8'10")	2.68m (8'10")	4.26m (16'0")	4.26m (16'0")	4.26m (16'0")	4.26m (16'0")
Opening width (E)	1.55 (5'0")	1.55 (5'0")	1.55 (5'0")	1.55 (5'0")	1.55 (5'0")	1.55 (5'0")	1.55 (5'0")
Unladen Weight	3520kg 7760lbs	3565kg 7831lbs	3620kg 7964lbs	4440kg 9790lbs	4505kg 9935lbs	4570kg 10080lbs	5370kg 11814lbs
Gross Weight (Field use max speed 15km/h)	11020kg 24300lbs	12397kg 27330lbs	13760kg 30336lbs	14940kg 32950lbs	16005kg 35287lbs	17070kg 37639lbs	18290kg 40238lbs
Gross Weight (Road use)	10270kg 22645lbs	10305kg 22718lbs	10340kg 22795lbs	11190kg 24680lbs	11225kg 24747lbs	11260kg 24828lbs	18290kg 40238lbs



Powerspread